



PATENT
112025-0195

UNITED STATES PATENT APPLICATION

of

5

Thomas Edsall

Silvano Gai

and

Soei-Shin Hang

for a

MULTIPLE PACKET PATHS TO IMPROVE RELIABILITY IN AN IP NETWORK

MULTIPLE PACKET PATHS TO IMPROVE RELIABILITY IN AN IP NETWORK

BACKGROUND OF THE INVENTION

Field of the Invention

This invention relates to reliable transfer of data packets over a computer network, and more particularly to reducing recovery time when a link is lost.

Background Information

An application such as voice over IP, that is carrying telephone conversations over a computer network, ordinarily makes use of an unreliable protocol such as the connectionless User Datagram Protocol (UDP). The connectionless UDP protocol is described by W. Richard Stevens in his book *TCP/IP Illustrated, Vol. 1*, published by Addison Wesley, Copyright date 1994, all disclosures of which are incorporated herein by reference, particularly pages 143-168.

When a packet is lost there is an interruption in the audio of the telephone conversation. However, it is not effective to re-send the lost packet after the conversation with the missing packet has passed the point in time that audio was lost.

Loss of a few seconds of audio packets may occur if a link through which the packets are travelling fails. Recovery of the connection through another link requires time, and may require several seconds using ordinary network protocols. Networks usually are designed with redundant interconnections and the Spanning Tree Protocol, a layer 2 protocol, and the Link State Packet

Routing protocol (LSP protocol), a layer 3 protocol, are used to establish a single path through the network. In the event that a link in the established path fails, these protocols then re-establish the connection through different links. However, as noted above, the time required to re-establish a path may be several seconds, for example 10 seconds or more. Such an interruption in a telephone conversation is noticeable and annoying to a person using a telephone connection.

The Spanning Tree Protocol and the Link State Packet Routing Protocol are next discussed, and some other common protocols are mentioned.

The layer 2 Spanning Tree Protocol, and also Layer 3 protocols such as Link State Packet (LSP) Routing, OSPF, and EIGRP, etc., are used to provide loop free data communication through a network having redundant links. These protocols also have recovery mechanisms which re-establish a communication pathway in the event that a chosen pathway suffers a catastrophic failure.

In more detail, the Spanning Tree Protocol eliminates packets travelling in loops in networks having redundant links, where the forwarding decisions are made by reading the fields of the Layer 2 header. The Layer 2 header of a packet has no indication of how long a packet has been travelling in the network, and so in the presence of a loop in the network Layer 2 topology, a packet can circulate endlessly in the network. Loops are eliminated by the Spanning Tree Protocol opening redundant links, thereby leaving a loop free path through the network.

Also, the Spanning Tree Protocol re-establishes communication in the event that a link in the network becomes unusable and data packets are lost. Communication is re-established by, first, the Spanning Tree Protocol setting up a network connection through a network with redundant multiple links between a source end station and a destination end station by selecting a single path through the network. In the event that a link in the selected path becomes in-operative, the Spanning Tree Protocol again executes and selects a new path through the network. However, it

takes considerable time for the network devices to become aware that a topological change has occurred in the network, and even more time for the Spanning Tree Protocol to execute and select a new route through the network. And, in a service requiring a high quality of service, such as voice over IP, the loss of connectivity caused by first detecting the loss of connectivity and then by selecting a new path, causes an undesirable interruption in the service. For example, if a telephone conversation goes quiet for 10 seconds, the interruption is quite noticeable and annoying to the user. The Spanning Tree Protocol is described by Radia Perlman in her book *Interconnections, Second Edition*, published by Addison Wesley, Copyright date 2000, all disclosures of which are incorporated herein by reference, especially at pages 58-79.

In Link State Packet Routing (LSP Routing) routers operating at Layer 3 determine a "best" route through the network. A cost is assigned to each link between routers. This assignment of costs is normally done by a network manager. In LSP routing each router learns its neighbor's names and addresses, generates a LSP packet containing a list of all of its known neighbors names and addresses, and the cost of transferring a packet to the neighbor, and then the router sends the LSP packet to all other routers. The receiving routers then build a table of known routers from the received LSP packets. A router needing a route to another router computes various tentative paths. The cost of each path is then computed. The router then selects the least cost path to the other router. Routing paths, at Layer 3, are selected to minimize the cost of establishing a routing pathway, for example, by use of the Dijkstra algorithm, as described by Radia Perlman in the above mentioned book *Interconnections, Second Edition* at pages 307-319. In the event that a link fails or the topology otherwise changes, considerable time is required for the fault to be detected and a new route selected. Again, the elapsed time interval is too great for applications requiring that packets travel from source to destination with minimum delay, and with high reliability. Packets are prevented from circulating endlessly in the event that a loop occurs in Layer 3 forwarding by each packet carrying a "time to live" counter which establishes a maximum number of times which a packet can be forwarded by Layer 3 forwarding.

In the Open Shortest Path First (OSPF) protocol a two Layer hierarchy has a backbone area with discrete areas attached to the backbone. Border routers between the backbone and the discrete areas provide connectivity between an area and the backbone. LSP routing is then used to choose a path through border routers, and the hierarchy helps simplify the route calculations. Again, the elapsed time between occurrence of a fault and the establishment of a new route is too long for a service requiring a high availability such as voice over an IP connection.

Further, routing protocols used by Cisco Systems, Inc. such as the Interior Gateway Routing Protocol (IGRP) and the Extended Interior Gateway Routing Protocol (EIGRP) also require more time than is desired in order to re-establish a connection after a link in the network fails. The IGRP and EIGRP protocols are described further in documents available at the URL:
<http://www.cisco.com/warp/public/103/eigrp1.html>.

There is needed a method to transfer data packets from a source station to a destination station when a failure occurs along a chosen pathway in the computer network, especially there is needed a method to establish a new path without an unacceptably long delay.

SUMMARY OF THE INVENTION

The invention replicates a packet requiring high availability and transmits it from two or more ports of a switch, for example a wiring closet Layer 2 switch. The parent packet carries a unique sequence number. The copies of the packet each carry the parent packet's unique sequence number. Each copy of the packet then travels on separate pathways through routers (Layer 3 network devices). The pathways are maintained separate by assigning high costs in a LSP routing sense to links connecting the two paths, and by assigning low costs to links along the desired paths. The two identical packets converge on the destination station. The destination station accepts the first packet with a particular sequence number, and discards any later packets with the same sequence number.

In the event that a link in one path has a catastrophic failure, then the packet travelling along the other path reaches the destination station and service remains operative without interruption. A router still receiving the lost packet, where the loss is due to a downstream failure, recomputes a new path. A new non-converging path may be selected if any are available, depending upon the topology. After the disruption is repaired, the original dual pathways may once again be established.

In a preferred embodiment of the invention, a digital telephone is connected to a Layer 2 switch. The layer 2 switch is usually located in a wiring closet of a building, the "initiating switch". The packet travelling from the digital telephone to the initiating switch in the wiring closet uses a "specially assigned" multicast MAC destination address. The specially assigned MAC address is added to all interfaces of the initiating switch that need to receive a packet from a digital telephone. The switch is configured to receive and replicate the packets having the specially assigned MAC address as their MAC DA, for example, the switch is so configured when it executes its initialization routines. The initiating switch replicates the packet using its ordinary multicast process and, responding to the "specially assigned" value, transmits identical packets onto two or more assigned ports. Each of the assigned ports is the starting point for the multiple independent paths to the receiver digital telephone. The packets take separate, non-converging, paths to a receiving Layer 2 switch in a wiring closet connected to the receiving digital telephone. The routers between the initiating Layer 2 switch and the receiving Layer 2 switch maintain separate paths in response to the assignment of costs, in the LSP protocol sense, to the routes.

In an alternative embodiment of the invention, the initiating network device may be a layer 3 router which receives the packets from the digital telephone. In the case that the initiating device is a layer 3 router, again the router is configured to receive the special MAC address and to replicate the packets. For example, the router is so configured when the router executes its initializing routines.

BRIEF DESCRIPTION OF THE DRAWINGS

Turning now to the drawings, in which like numerals represent like parts in the several views:

Fig. 1A is a block diagram of a computer network for use with a digital telephone, in accordance with the invention;

Fig. 1B is a block diagram of a digital telephone in accordance with the invention;

Fig. 2 is a block diagram of a computer network showing a few interconnected buildings in accordance with the invention;

Fig. 3 is a block diagram of a computer network showing a plurality of buildings interconnected in accordance with the invention;

Fig. 4A is a field diagram of a MAC layer frame;

Fig. 4B is a field diagram of an IP layer frame;

Fig. 4C is a field diagram of a UDP frame;

Fig. 4D is a field diagram of a RTP frame;

Fig. 5 is an Interface MAC Receive Table for receiving packets, in accordance with the invention; and,

Fig. 6 is a block diagram of hardware which can serve as a Layer 2 switch or as a Layer 3 router.

DETAILED DESCRIPTION OF AN ILLUSTRATIVE EMBODIMENT

Turning now to Fig. 1A, computer network 100 is shown. Computer network 100 is
5 arranged for transmission of voice traffic from digital telephone 102 to digital telephone 104. The
letter “D” in the drawing indicates that the telephone is a digital telephone. A person speaking on
digital telephone 102 sends data packets, for example Ethernet packets, along computer network
connection 103 to network device 108.

Turning now to Fig. 1B, digital telephone 102T is shown. Digital telephone 102T has an
10 analog telephone 102A coupled to analog to digital converter (A/D) 102B. The analog nature of
analog telephone 102A is shown by the letter “A” in the drawing. In turn, A/D converter 102B is
coupled to microprocessor bus 102C. Also coupled to microprocessor bus 102C are
microprocessor central processor unit (CPU) 102D; memory unit 102M; and, input output unit (I/O
unit) 102E.

In operation, when digital telephone 102T serves a transmitting role, a person speaking into
15 handset 102F generates an analog signal which is digitized by A/D converter 102B. The digitized
signal is transferred to microprocessor bus 102C and is packed into a data packet suitable for
transmission on a computer network by inter-operation of CPU 102D, programs and data stored in
20 memory unit 102M, and by I/O unit 102E. A packet is transmitted onto a computer network
connection 102H, for example an Ethernet packet. The computer network packet transmitted onto
computer network connection 102H is written with a specially assigned MAC (layer 2) destination
address, as will be further described hereinbelow.

25 In the event that digital telephone 102T serves as a receiving telephone, computer data
packets are received on computer network connection 102H by I/O unit 102E. The received
computer packets are processed by interoperation of CPU 102D, programs and data stored in

memory unit 102M, and A/D converter 102B to produce an analog signal delivered to analog telephone 102A by A/D unit 102B. A person using handset 102F then hears an audible signal produced by analog telephone 102F creating sound waves in the air in response to the analog signal delivered to it by A/D converter 102B. Accordingly, computer data packets containing voice data
5 arriving at computer network connection 102H produce an audible signal for a person using analog telephone 102A to hear.

In a preferred embodiment of the invention, data packets containing digitized voice information transmitted by digital telephone 102T through computer network connection 102H to a
10 receiving digital telephone are Ethernet data packets. The A/D converter 102B generates a particular encoding of voice, for example G.729 or G.711. The microprocessor puts the information into RTP - UDP - IP - MAC frames and queues them for transmission on the Ethernet connection through I/O unit 102E to switch 108, as described more fully herein-below.

Returning to a discussion of Fig. 1, computer network packets suitable for transmission on a computer network travel from digital telephone 102 to L2 switch 108. The packets have as their MAC destination address the "special multicast address". L2 switch 108 is commonly referred to as a "wiring closet" switch, as computer networks installed in a building often use an L2 switch as a first switching device in the network. In response to the "special multicast" MAC DA of the
15 packet, L2 switch 108 replicates the packet received on port 108A and transmits it out through both port 108B and port 108C.

The packet received on port 108A carries a "sequence number" in the RTP header, as described with reference to Figs. 4A-4D. When L2 switch 108 replicates the packet, the replicated
20 packets are identical in all levels, from MAC up, and therefore the RTP sequence numbers are identical in the replica packets.

5 The packet transmitted through port 108B is received by router 110. Router 110 makes a routing decision and transmits the packet through a port to router 112. Router 112 makes a routing decision and transmits the packet to router 114. Router 114 makes a routing decision and transmits the packet to L2 switch 118. L2 switch 118 receives the packet at its port 118A. L2 switch 118 is also a "wiring closet" switch, and is either in the same building or a different building from wiring closet switch 108. The packet received by L2 switch 118 is then transmitted through a port to digital telephone 104. Digital telephone 104 converts the received computer network packet into an analog signal, and finally into audible sound waves, as described with reference to Fig. 1B, and a person using the digital telephone 104 hears the sounds. In this way, a speaker using digital telephone 102 can be heard by a listener using digital telephone 104.

10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
105
110
115
120
125
130
135
140
145
150
155
160
165
170
175
180
185
190
195
200
205
210
215
220
225
230
235
240
245
250
255
260
265
270
275
280
285
290
295
300
305
310
315
320
325
330
335
340
345
350
355
360
365
370
375
380
385
390
395
400
405
410
415
420
425
430
435
440
445
450
455
460
465
470
475
480
485
490
495
500
505
510
515
520
525
530
535
540
545
550
555
560
565
570
575
580
585
590
595
600
605
610
615
620
625
630
635
640
645
650
655
660
665
670
675
680
685
690
695
700
705
710
715
720
725
730
735
740
745
750
755
760
765
770
775
780
785
790
795
800
805
810
815
820
825
830
835
840
845
850
855
860
865
870
875
880
885
890
895
900
905
910
915
920
925
930
935
940
945
950
955
960
965
970
975
980
985
990
995
1000
1005
1010
1015
1020
1025
1030
1035
1040
1045
1050
1055
1060
1065
1070
1075
1080
1085
1090
1095
1100
1105
1110
1115
1120
1125
1130
1135
1140
1145
1150
1155
1160
1165
1170
1175
1180
1185
1190
1195
1200
1205
1210
1215
1220
1225
1230
1235
1240
1245
1250
1255
1260
1265
1270
1275
1280
1285
1290
1295
1300
1305
1310
1315
1320
1325
1330
1335
1340
1345
1350
1355
1360
1365
1370
1375
1380
1385
1390
1395
1400
1405
1410
1415
1420
1425
1430
1435
1440
1445
1450
1455
1460
1465
1470
1475
1480
1485
1490
1495
1500
1505
1510
1515
1520
1525
1530
1535
1540
1545
1550
1555
1560
1565
1570
1575
1580
1585
1590
1595
1600
1605
1610
1615
1620
1625
1630
1635
1640
1645
1650
1655
1660
1665
1670
1675
1680
1685
1690
1695
1700
1705
1710
1715
1720
1725
1730
1735
1740
1745
1750
1755
1760
1765
1770
1775
1780
1785
1790
1795
1800
1805
1810
1815
1820
1825
1830
1835
1840
1845
1850
1855
1860
1865
1870
1875
1880
1885
1890
1895
1900
1905
1910
1915
1920
1925
1930
1935
1940
1945
1950
1955
1960
1965
1970
1975
1980
1985
1990
1995
2000
2005
2010
2015
2020
2025
2030
2035
2040
2045
2050
2055
2060
2065
2070
2075
2080
2085
2090
2095
2100
2105
2110
2115
2120
2125
2130
2135
2140
2145
2150
2155
2160
2165
2170
2175
2180
2185
2190
2195
2200
2205
2210
2215
2220
2225
2230
2235
2240
2245
2250
2255
2260
2265
2270
2275
2280
2285
2290
2295
2300
2305
2310
2315
2320
2325
2330
2335
2340
2345
2350
2355
2360
2365
2370
2375
2380
2385
2390
2395
2400
2405
2410
2415
2420
2425
2430
2435
2440
2445
2450
2455
2460
2465
2470
2475
2480
2485
2490
2495
2500
2505
2510
2515
2520
2525
2530
2535
2540
2545
2550
2555
2560
2565
2570
2575
2580
2585
2590
2595
2600
2605
2610
2615
2620
2625
2630
2635
2640
2645
2650
2655
2660
2665
2670
2675
2680
2685
2690
2695
2700
2705
2710
2715
2720
2725
2730
2735
2740
2745
2750
2755
2760
2765
2770
2775
2780
2785
2790
2795
2800
2805
2810
2815
2820
2825
2830
2835
2840
2845
2850
2855
2860
2865
2870
2875
2880
2885
2890
2895
2900
2905
2910
2915
2920
2925
2930
2935
2940
2945
2950
2955
2960
2965
2970
2975
2980
2985
2990
2995
3000
3005
3010
3015
3020
3025
3030
3035
3040
3045
3050
3055
3060
3065
3070
3075
3080
3085
3090
3095
3100
3105
3110
3115
3120
3125
3130
3135
3140
3145
3150
3155
3160
3165
3170
3175
3180
3185
3190
3195
3200
3205
3210
3215
3220
3225
3230
3235
3240
3245
3250
3255
3260
3265
3270
3275
3280
3285
3290
3295
3300
3305
3310
3315
3320
3325
3330
3335
3340
3345
3350
3355
3360
3365
3370
3375
3380
3385
3390
3395
3400
3405
3410
3415
3420
3425
3430
3435
3440
3445
3450
3455
3460
3465
3470
3475
3480
3485
3490
3495
3500
3505
3510
3515
3520
3525
3530
3535
3540
3545
3550
3555
3560
3565
3570
3575
3580
3585
3590
3595
3600
3605
3610
3615
3620
3625
3630
3635
3640
3645
3650
3655
3660
3665
3670
3675
3680
3685
3690
3695
3700
3705
3710
3715
3720
3725
3730
3735
3740
3745
3750
3755
3760
3765
3770
3775
3780
3785
3790
3795
3800
3805
3810
3815
3820
3825
3830
3835
3840
3845
3850
3855
3860
3865
3870
3875
3880
3885
3890
3895
3900
3905
3910
3915
3920
3925
3930
3935
3940
3945
3950
3955
3960
3965
3970
3975
3980
3985
3990
3995
4000
4005
4010
4015
4020
4025
4030
4035
4040
4045
4050
4055
4060
4065
4070
4075
4080
4085
4090
4095
4100
4105
4110
4115
4120
4125
4130
4135
4140
4145
4150
4155
4160
4165
4170
4175
4180
4185
4190
4195
4200
4205
4210
4215
4220
4225
4230
4235
4240
4245
4250
4255
4260
4265
4270
4275
4280
4285
4290
4295
4300
4305
4310
4315
4320
4325
4330
4335
4340
4345
4350
4355
4360
4365
4370
4375
4380
4385
4390
4395
4400
4405
4410
4415
4420
4425
4430
4435
4440
4445
4450
4455
4460
4465
4470
4475
4480
4485
4490
4495
4500
4505
4510
4515
4520
4525
4530
4535
4540
4545
4550
4555
4560
4565
4570
4575
4580
4585
4590
4595
4600
4605
4610
4615
4620
4625
4630
4635
4640
4645
4650
4655
4660
4665
4670
4675
4680
4685
4690
4695
4700
4705
4710
4715
4720
4725
4730
4735
4740
4745
4750
4755
4760
4765
4770
4775
4780
4785
4790
4795
4800
4805
4810
4815
4820
4825
4830
4835
4840
4845
4850
4855
4860
4865
4870
4875
4880
4885
4890
4895
4900
4905
4910
4915
4920
4925
4930
4935
4940
4945
4950
4955
4960
4965
4970
4975
4980
4985
4990
4995
5000
5005
5010
5015
5020
5025
5030
5035
5040
5045
5050
5055
5060
5065
5070
5075
5080
5085
5090
5095
5100
5105
5110
5115
5120
5125
5130
5135
5140
5145
5150
5155
5160
5165
5170
5175
5180
5185
5190
5195
5200
5205
5210
5215
5220
5225
5230
5235
5240
5245
5250
5255
5260
5265
5270
5275
5280
5285
5290
5295
5300
5305
5310
5315
5320
5325
5330
5335
5340
5345
5350
5355
5360
5365
5370
5375
5380
5385
5390
5395
5400
5405
5410
5415
5420
5425
5430
5435
5440
5445
5450
5455
5460
5465
5470
5475
5480
5485
5490
5495
5500
5505
5510
5515
5520
5525
5530
5535
5540
5545
5550
5555
5560
5565
5570
5575
5580
5585
5590
5595
5600
5605
5610
5615
5620
5625
5630
5635
5640
5645
5650
5655
5660
5665
5670
5675
5680
5685
5690
5695
5700
5705
5710
5715
5720
5725
5730
5735
5740
5745
5750
5755
5760
5765
5770
5775
5780
5785
5790
5795
5800
5805
5810
5815
5820
5825
5830
5835
5840
5845
5850
5855
5860
5865
5870
5875
5880
5885
5890
5895
5900
5905
5910
5915
5920
5925
5930
5935
5940
5945
5950
5955
5960
5965
5970
5975
5980
5985
5990
5995
6000
6005
6010
6015
6020
6025
6030
6035
6040
6045
6050
6055
6060
6065
6070
6075
6080
6085
6090
6095
6100
6105
6110
6115
6120
6125
6130
6135
6140
6145
6150
6155
6160
6165
6170
6175
6180
6185
6190
6195
6200
6205
6210
6215
6220
6225
6230
6235
6240
6245
6250
6255
6260
6265
6270
6275
6280
6285
6290
6295
6300
6305
6310
6315
6320
6325
6330
6335
6340
6345
6350
6355
6360
6365
6370
6375
6380
6385
6390
6395
6400
6405
6410
6415
6420
6425
6430
6435
6440
6445
6450
6455
6460
6465
6470
6475
6480
6485
6490
6495
6500
6505
6510
6515
6520
6525
6530
6535
6540
6545
6550
6555
6560
6565
6570
6575
6580
6585
6590
6595
6600
6605
6610
6615
6620
6625
6630
6635
6640
6645
6650
6655
6660
6665
6670
6675
6680
6685
6690
6695
6700
6705
6710
6715
6720
6725
6730
6735
6740
6745
6750
6755
6760
6765
6770
6775
6780
6785
6790
6795
6800
6805
6810
6815
6820
6825
6830
6835
6840
6845
6850
6855
6860
6865
6870
6875
6880
6885
6890
6895
6900
6905
6910
6915
6920
6925
6930
6935
6940
6945
6950
6955
6960
6965
6970
6975
6980
6985
6990
6995
7000
7005
7010
7015
7020
7025
7030
7035
7040
7045
7050
7055
7060
7065
7070
7075
7080
7085
7090
7095
7100
7105
7110
7115
7120
7125
7130
7135
7140
7145
7150
7155
7160
7165
7170
7175
7180
7185
7190
7195
7200
7205
7210
7215
7220
7225
7230
7235
7240
7245
7250
7255
7260
7265
7270
7275
7280
7285
7290
7295
7300
7305
7310
7315
7320
7325
7330
7335
7340
7345
7350
7355
7360
7365
7370
7375
7380
7385
7390
7395
7400
7405
7410
7415
7420
7425
7430
7435
7440
7445
7450
7455
7460
7465
7470
7475
7480
7485
7490
7495
7500
7505
7510
7515
7520
7525
7530
7535
7540
7545
7550
7555
7560
7565
7570
7575
7580
7585
7590
7595
7600
7605
7610
7615
7620
7625
7630
7635
7640
7645
7650
7655
7660
7665
7670
7675
7680
7685
7690
7695
7700
7705
7710
7715
7720
7725
7730
7735
7740
7745
7750
7755
7760
7765
7770
7775
7780
7785
7790
7795
7800
7805
7810
7815
7820
7825
7830
7835
7840
7845
7850
7855
7860
7865
7870
7875
7880
7885
7890
7895
7900
7905
7910
7915
7920
7925
7930
7935
7940
7945
7950
7955
7960
7965
7970
7975
7980
7985
7990
7995
8000
8005
8010
8015
8020
8025
8030
8035
8040
8045
8050
8055
8060
8065
8070
8075
8080
8085
8090
8095
8100
8105
8110
8115
8120
8125
8130
8135
8140
8145
8150
8155
8160
8165
8170
8175
8180
8185
8190
8195
8200
8205
8210
8215
8220
8225
8230
8235
8240
8245
8250
8255
8260
8265
8270
8275
8280
8285
8290
8295
8300
8305
8310
8315
8320
8325
8330
8335
8340
8345
8350
8355
8360
8365
8370
8375
8380
8385
8390
8395
8400
8405
8410
8415
8420
8425
8430
8435
8440
8445
8450
8455
8460
8465
8470
8475
8480
8485
8490
8495
8500
8505
8510
8515
8520
8525
8530
8535
8540
8545
8550
8555
8560
8565
8570
8575
8580
8585
8590
8595
8600
8605
8610
8615
8620
8625
8630
8635
8640
8645
8650
8655
8660
8665
8670
8675
8680
8685
8690
8695
8700
8705
8710
8715
8720
8725
8730
8735
8740
8745
8750
8755
8760
8765
8770
8775
8780
8785
8790
8795
8800
8805
8810
8815
8820
8825
8830
8835
8840
8845
8850
8855
8860
8865
8870
8875
8880
8885
8890
8895
8900
8905
8910
8915
8920
8925
8930
8935
8940
8945
8950
8955
8960
8965
8970
8975
8980
8985
8990
8995
9000
9005
9010
9015
9020
9025
9030
9035
9040
9045
9050
9055
9060
9065
9070
9075
9080
9085
9090
9095
9100
9105
9110
9115
9120
9125
9130
9135
9140
9145
9150
9155
9160
9165
9170
9175
9180
9185
9190
9195
9200
9205
9210
9215
9220
9225
9230
9235
9240
9245
9250
9255
9260
9265
9270
9275
9280
9285
9290
9295
9300
9305
9310
9315
9320
9325
9330
9335
9340
9345
9350
9355
9360
9365
9370
9375
9380
9385
9390
9395
9400
9405
9410
9415
9420
9425
9430
9435
9440
9445
9450
9455
9460
9465
9470
9475
9480
9485
9490
9495
9500
9505
9510
9515
9520
9525
9530
9535
9540
9545
9550
9555
9560
9565
9570
9575
9580
9585
9590
9595
9600
9605
9610
9615
9620
9625
9630
9635
9640
9645
9650
9655
9660
9665
9670
9675
9680
9685
9690
9695
9700
9705
9710
9715
9720
9725
9730
9735
9740
9745
9750
9755
9760
9765
9770
9775
9780
9785
9790
9795
9800
9805
9810
9815
9820
9825
9830
9835
9840
9845
9850
9855
9860
9865
9870
9875
9880
9885
9890
9895
9900
9905
9910
9915
9920
9925
9930
9935
9940
9945
9950
9955
9960
9965
9970
9975
9980
9985
9990
9995
10000
10005
10010
10015
10020
10025
10030
10035
10040
10045
10050
10055
10060
10065
10070
10075
10080
10085
10090
10095
10100
10105
10110
10115
10120
10125
10130
10135
10140
10145
10150
10155
10160
10165
10170
10175
10180

L2 switch 118. Accordingly, router 110, 130 and routers 114 and 134 are referred to as "building routers". Routers 112 and 132 are referred to as "backbone routers", as in a typical installation these routers connect the computer networks of various buildings together into a more complete network, as described in greater detail herein below.

5

Routers normally make their routing decision based upon Link State Packet Routing (LSP Routing). In LSP Routing, a network manager assigns costs to various links. Accordingly, costs are assigned to links of the computer network 100 of Fig. 1, so as to encourage the routers to develop routing pathways using standard LSP Routing to transfer the packets transmitted at ports 108B and 108C so that the packets take different pathways from L2 switch 108 to L2 switch 118. Assignment of costs to the various links may, for example, be done as follows. Link 109, between port 108B and router 110, link 111 between router 110 and router 112, link 113 between router 112 and router 114, and link 115 between router 114 and L2 switch 118 may all be assigned low costs, for example, a cost of 10. Similarly, link 121 between port 108C and 130, link 131 between router 130 and router 132, link 133 between router 132 and router 134, and link 135 between router 134 and L2 switch 118 may also be assigned low costs, for example, a cost of 10. Further, links connecting the various routers are assigned high costs. For example, link 141 between router 110 and router 130, link 143 between router 112 and router 132, and link 145 between router 114 and router 134, may each be assigned high costs, for example, costs of 1,000 may be assigned to these links.

20

With an assignment of costs as described, normal Link State Packet Routing causes the routers 110, 112, and 114, to transfer the packet received from L2 switch port 108B along links 109, 111, 113, 115 and to L2 switch 118. Also, this assignment of costs causes routers 130, router 132, and router 134 to transfer a packet from port 108C of L2 switch 108 along links 121, 131, 133, and 135 to L2 switch 118.

25

The routers do not transfer the packets through links 141, 143 or 145 because of the high costs assigned to these links. Accordingly, under normal operation of LSP Routing, the pairs of identical packets transmitted by L2 switch 108 on its 2 ports 108B and 108C do not converge until they reach the receiving wiring closet switch, L2 switch 118.

5

In the event that a link such as link 131 should become inoperative, then the router 130 will respond by recalculating its Link State Packet Route and transfer packets through link 141. That is, the routers will transfer packets along the high cost links only in the event that an interruption in service along a low cost link occurs.

Referring now to L2 switch 118 in the event a fault occurs along one of the pathways, for example, in the event that link 131 becomes inoperative, then packets travelling from port 108C of L2 switch 108 will fail to reach L2 switch 118. However, packets following along the other pathway, links 109, 111, 113, 115 will reach L2 switch 118 without problem or delay.

Accordingly, a telephone conversation between digital telephone 102 and digital telephone 104 will not be interrupted by the development of a fault in link 131. In the event that a fault occurs in link 131 or 133 or in one of the routers 132, 134, etc. then router 130 recomputes its route under Link State Packet Routing, and begins transmitting its packet along link 141 to router 110. Router 110 will then make a routing decision and transfer the packet along link 111 to router 112, etc.

Accordingly, then L2 switch 118 will receive two identical packets for each data packet generated by digital telephone 102, with both packets received at port 118A. The receipt of these two identical data packets causes no problem as the first data packet received with a specific sequence number will be converted to audio by digital telephone 104, and the second packet with the same sequence number will be discarded. Either the L2 switch 118 or the digital telephone 104 may keep track of the sequence numbers and use the first packet with a sequence number to generate audio, and discard all subsequent packets with the same sequence number.

Turning now to Fig. 2, computer network 200 is shown. Computer network 200 interconnects a plurality of buildings 201A, 201B, 201C, 201D, etc. For example, computer network 200 supports a telephone conversation between digital telephone 202 and digital telephone 205. Digital telephone 202 transfers digitized voice packets to wiring closet Layer 2 switch 208. Wiring closet switch 208 connects to two separate building routers, router 210 and router 212, where router 210 is analogous to router 130 of Fig. 1A, and router 212 is analogous to router 110 of Fig. 1A. Router 212 connects to backbone router 214, and building router 210 connects to backbone router 216. Backbone router 214 connects to building router 218 of building 220, and building router 218 connects to wiring closet Layer 2 switch 222. Wiring closet switch 222 transfers the data packet to digital telephone 205.

Similarly, an identical packet is transmitted by wiring closet Layer 2 switch 208 to building router 210, and the packet is transferred from building router 210 to backbone router 216, and backbone router 216 transfers the packet to building router 230, where building router 230 is in building 220. The packet is transferred from building router 230 to wiring closet Layer 2 switch 222, where the packet may be transferred digital telephone 205. The first packet arriving with a particular sequence number is converted into audio by the digital telephone, and all subsequent packets with that sequence number are discarded.

Again, costs are assigned to various links so that routers 212, 214, 218 transfer the packet received by router 212 along link 234 and link 236 to building 220, and thence to wiring closet switch 222. Also, the assignment of costs causes router 210 to transfer the packet which it receives from wiring closet switch 208 along link 240 to router 216, and router 216 transfers the packet along link 242 to building router 230, which then transfers the packet to wiring closet switch 222.

The packets travelling along the route from router 212, router 214, router 218 do not converge with the path of the packets travelling along the pathway from router 210, router 216, and router 230. An assignment of costs to cause the standard Link State Packet Routing to achieve

independent routes which do not converge, may, for example, be assigned as follows. Link 234 between router 212 and router 214, and link 236 between router 214 and router 218 are assigned a low cost, for example, a cost of 10. Similarly, link 240 between router 210 and router 216, and link 242 between router 216 and router 230 are assigned a low cost, for example, a cost of 10. Further, link 245 between router 212 and router 210, link 247 between router 214 and router 216, and link 249 between router 218 and router 230, are assigned a high cost, for example, a cost of 1,000. Normal Link State Packet Routing causes router 212 to develop a route through router 214 and router 218, because of the cost assignments. Also, the cost assignments cause router 210 to develop a path through 216 and router 230. Thus, the identical packets generated by wiring closet switch 208 do not converge until they reach the wiring closet switch 222 attached to destination digital telephone 205.

Turning now to Fig. 3, computer network 300 is shown. Computer network 300 connects digital telephones in a plurality of buildings, for example, building 312, building 314, building 316, building 318, building 320, building 322, building 324, building 326, building 328, building 330, building 332, and building 334, etc. Three dots 336 and 338 indicate that an arbitrarily large number of buildings may be interconnected in computer network 300.

Computer network 300 has two (2) pathways, as shown in Fig. 1 and Fig. 2, for a telephone conversation between any two digital telephones in any of the buildings. In an alternative embodiment of the invention, three or more paths between buildings may be used in order to increase reliability in voice communications. Only two non-converging paths are shown in Fig. 3 in order to keep the drawing simple. The three or more paths are maintained non-converging until the receiving wiring closet network device by assignment of costs, in the LSP protocol sense, to links of the network.

For example, digital telephone 350 connects to the network through wiring closet switch 354. Also, receiving digital telephone 356 connects to the network through wiring closet switch

360. In the event that a telephone conversation originates from digital telephone 350 a digitized audio packet is transmitted to wiring closet switch 354. Wiring closet switch 354 replicates the packet and transmits identical copies to building routers 362, 364. Building router 362 transmits the packet which it receives to backbone router 368, and backbone router 368 transmits the packet
5 through low cost link 370 to backbone router 372. Backbone router 372 transmits the packet through low cost link 374 to backbone router 376. Backbone router 376 transfers the packet through low cost link 378. Building router 380 receives the packet through low cost link 378 and transfers the packet to wiring closet switch 360. Wiring closet switch 360 transfers the packet to receiving digital telephone 356.

Also, the packet transmitted by wiring closet switch 354 to building router 364 is transferred to backbone router 382. Backbone router 382 transfers the packet along low cost link 383 to backbone router 384. Backbone router 384 transfers the packet through low cost link 385 to backbone router 386. Backbone router 386 transfers the packet to building router 388. Building router 388 then transfers the packet to wiring closet switch 360. Wiring closet switch 360 transfers the packet to digital telephone 356. The first packet with a particular sequence number to reach wiring closet switch 360 (or, for example, digital telephone 356) is translated into analog audio by digital telephone 356. Subsequently received packets with the same sequence number are simply discarded.

High cost links connect various routers of computer network 300, so that the routers will generate a route under ordinary Link State Packet Routing as described above. The high cost links will then be used by the network in the event that one of the low cost pathways becomes inoperative. The high cost links which serve for use in the event of a fault are, for example, link
25 391, link 393, link 395, link 397, and link 399. For example, low costs, for instance, a cost of 10, may be assigned to links 370, 383, 374, 385, etc., and high costs, for example, a cost of 1,000, may be assigned to links 391, 393, 395, 397, 399, etc. The high cost links will be utilized through

ordinary Link State Packet Routing in the event that a fault prevents flow of packets along the low cost links.

Turning now to Fig. 4A, a typical data voice packet 400 is shown. Data voice packet 400 is shown as a MAC layer packet. Data voice packet 400 is a form of voice packet which, for example, may be used in the practice of the invention. Illustrative data voice packet 400 basic structure is taken from the Real Time Protocol (RTP) as described in RFC 1889, all disclosures of which are incorporated herein by reference. An RFC is a request for comments published by the Internet Engineering Task Force (IETF). RFC documents are published on the IETF web page at the URL:
<http://www.ietf.org>.

Voice packet 400 is transmitted by I/O unit 102E, for example, to L2 switch 108. Switch 108 then replicates voice packet 400 and transmits it out through multiple ports to the multiple non-converging paths of the invention.

Voice packet 400 has MAC Layer 2 header 402 and MAC payload field 403, and end of packet fields 416. The end of packet fields 416 are the standard fields for the protocol utilized by the computer network. MAC payload field 403 contains layer 3 IP fields shown in Fig. 4B.

The Layer 3 fields shown in Fig. 4B contain IP header 404 and IP payload field 405. The IP header 404 contains the layer 3 destination address IP DA, the IP source address IP SA, and other layer 3 fields indicated as "IP other". The IP payload field contains the User Datagram Protocol (UDP) fields shown in Fig. 4C.

The UDP fields 406 contain the UDP header 407 and the UDP payload field 408. The UDP payload field contains the RTP packet fields as shown in Fig. 4D.

The RTP packet fields shown in Fig. 4D contain the RTP header fields 412, and the RTP payload voice samples 414. The RTP header fields shown in Fig. 4D contain the sequence number field 416 and other RTP header fields 418. The voice samples being transported from the source digital telephone to the destination digital telephone are carried in RTP payload voice samples field 414.

The Layer 2 MAC destination address field 420 contains a special multicast address. A multicast address is used in the MAC Layer 2 DA field so that L2 switch 108 uses its multicast capability to replicate the data packet received from digital telephone 102. A "special" multicast address is assigned for practice of the invention so that L2 switch 108 transmits replicated voice packets on assigned ports only, and not all of its ports. For example, as shown in Fig. 1, replicated packets are transmitted on only two ports, port 108B and port 108C.

In an alternative embodiment of the invention, a wiring closet device, either a switch or router, may transmit identical copies of the voice packet out through three or more ports in order to increase the redundancy of the non-converging paths in order to improve reliability of the communication session. That is, rather than using only two parallel non converging paths in order to improve reliability of voice packet transmission across the computer network, three or more non-converging pathways may be utilized. For example, L2 switch 108 could transmit replicated packets on three or more ports, the ports could each have separate router pathways to prevent convergence of the pathways before the receiving wiring closet switch. The desired pathways to the destination wiring closet switches are assigned low costs in a LSP Routing sense. LSP Routing then chooses the non-converging low cost pathways for ordinary routing. Interconnecting links between routers are assigned high costs so that the interconnecting pathways are selected by LSP Routing algorithms only when a low cost path has been interrupted.

Also, the special multicast address for the reliable audio communication is added to the layer 2 switch or the router Layer 2 table "for receipt of data packets", that is the "Interface MAC

Receive Table” as shown in Fig. 5. A router normally receives only those data packets whose destination address is included in a Layer 2 table in an interface of the router, where that table instructs the router to receive the packet. Packets with a different MAC Layer destination address are ignored by the router. The special multicast address of the invention is placed in the “Interface
5 MAC Receive Table” as shown, for example, in Fig. 5.

Sequence number 416 is utilized by a receiving wiring closet switch and/or digital telephone in order to trigger conversion of the first received packet into audio for reproduction by the digital telephone, and to discard the second or any subsequent packets with that same sequence number. For example, the wiring closet switch may simply forward all packets to the digital telephone, and the digital telephone keeps track of the sequence numbers and reproduces only the first received packet with a sequence number.

Alternatively, the wiring closet switch may keep track of the sequence numbers, and forward only the first received packet with a particular sequence number to the digital telephone.

Also the wiring closet device may be either a Layer 2 switch as described hereinabove, or may alternatively be a Layer 3 device such as a router, or may be any other convenient packet forwarding device.

Turning now to Fig. 5, a Table, referred to as "Interface MAC Receive Table" 500 is shown. Interface MAC Receive Table 500 is used by an interface at layer 2 in order to select packets with desired MAC addresses, in accordance with the invention. The layer 2 switch or the router receives packets having a Layer 2 MAC destination address found in Interface MAC Receive Table 500.
25 Layer 2 Table 500 has entries 502, 504 indicated by three dots, the special multicast address 506, and additional entries indicated by three dots 508. Accordingly, the special multicast address 506 for use with the invention is added to Interface MAC Receive Table 500 for all of the wiring closet switches receiving voice packets from digital telephones.

An alternative embodiment of the invention may use layer 3 routers as wiring closet devices 108, 118, 210, 222, 354, 360, etc. In this alternative embodiment of the invention, the layer 2 table of the router is modified as shown in "Interface MAC Receive Table" 500 to contain an entry for the Special Multicast Address 506. In response to receiving a packet having the Special Multicast Address in its MAC DA field, the network device, layer 3 router in this case, replicates the packet and transmits it out through designated ports as described hereinabove with reference to Fig. 1, Fig. 2, Fig. 3, etc. Also the network device, when receiving a RTP packet routes the packets to the digital telephone. Again, either the network device or the digital telephone may filter for the first packet with a particular sequence number, and only the first received packet is converted into audio sound waves heard by the user of the digital telephone.

In a preferred embodiment of the invention, a digital telephone is connected to a Layer 2 switch in a wiring closet of a building, the "initiating switch". The packet travelling from the digital telephone to the initiating switch in the wiring closet uses a "specially assigned" multicast MAC destination address written into entry 506. The specially assigned MAC address is added to all interfaces of the initiating switch that need to receive a packet from a digital telephone. The switch is configured to receive and replicate the packets having the specially assigned MAC address as their MAC DA, for example, the switch is so configured when it executes its initialization routines. The initiating switch replicates the packet using its ordinary multicast process and, responding to the "specially assigned" value, transmits identical packets onto two assigned ports.

Turning now to Fig. 6, block diagram 600 of a representative hardware structure for internal operation of a Layer 2 switch or Layer 3 router is shown. Each linecard 602, 604, ... 608 supports a port. For example, linecard 602 has port 602A; linecard 604 has port 604A; linecard 606 has port 606A, ... and linecard 608 has port 608A, etc. Each linecard has a memory unit. For example, linecard 602 has memory unit 602M, linecard 604 has memory unit 604M, linecard 606 has

memory unit 606M... and linecard 608 has memory unit 608M, etc. Each line card has a processor P, indicated by blocks 602P, 604P, 606P, ... 608P, etc. The various linecards are interconnected by switch fabric 610. Switch fabric 610 may be, for example, a crossbar type switch fabric, an ATM based switch fabric, or may be simply a computer bus. A central processor unit forwarding engine 612 also attaches to switch fabric 610. In operation, a packet arrives at a port of a linecard and is transferred by switch fabric 610 to memory units in the required linecards.

Further, CPU control engine 630 attaches to switch fabric 610. CPU control engine 630 is used to execute various control protocols for the network device. For example, CPU control engine 630 may be used to execute the Spanning Tree Protocol, the Link State Routing Protocol, the OSPF protocol, the IGRP protocol, the EIGRP protocol, etc. Data read from various fields of a received packets are transferred to CPU control engine 630. Then CPU control engine exercises control of the network device through switch fabric 610, through control lines not shown in Fig. 6, etc.

For example, in the event that a packet is received from an external connection at port 602A, the packet arrives at port 602A, is stored in memory unit 602M, and is simultaneously transmitted on switch fabric 610 to all of the other linecards, where the packet is stored in the memory unit of each of the other linecards. The memory 602M in the receiving linecard is necessary as a buffer in the event that switch fabric 610 is busy at the time that the packet arrives at port 602A. Processors 602P, 604P, 606P, ... 608P, etc. on each linecard receive information from circuits on the linecard interpreting fields of the packets as the packet is being received.

In an exemplary embodiment of the invention, processors 602P, 604P, 606P, ... 608P, etc. on the individual linecards act as forwarding engines and make decisions concerning the ports through which the packet is to be transmitted.

In an alternative exemplary embodiment of a Layer 2 switch or Layer 3 router, as the packet is being transferred on switch fabric 610 to all of the other linecards, fields of the packet are

interpreted by circuitry in the receiving linecard, information is transferred to CPU forwarding engine 612, and CPU 612 makes decisions concerning which ports the packet is to be transmitted out through. Once CPU 612 makes a decision as to which ports the packet should be forwarded through, CPU 612 asserts control lines (not shown in Fig. 6) which grant permission to the
5 appropriate linecards to transmit the packet out through that linecard's port.

In an exemplary embodiment of the invention, hardware 600 may represent a Layer 2 wiring closet switch such as wiring closet switches 108, 118, etc. For example, in a wiring closet switch operating by making forwarding decisions by reading Layer 2 fields, the linecards may read the fields as the packet is being received. Then, based upon the "special multicast" address of the invention being found in the MAC DA field 420, the packet is held in line card memory while the forwarding engine CPU 612 makes a decision.

In accordance with the invention, a processor provided by the Layer 2 switch or Layer 3 router, such as for example linecard processors 602P, 604P, ... 608P, etc., or for example the forwarding engine CPU 612, decide that this particular multicast address in a packet arriving on the input port must be replicated and transmitted out through the assigned ports for that particular multicast address. That is, in this exemplary embodiment of the invention, a wiring closet switch such as Layer 2 switch 108 decides to transmit a packet received on port 108A out through port
108B and port 108C.

As a further example, the hardware 600 may represent a Layer 3 router such as building routers 110, 120, 114, 134, or backbone routers 112, 132, etc. In this exemplary embodiment of the hardware 600, the line cards read the Layer 3 fields 404. When a routing decision is required, the linecard processors or the CPU forwarding engine 612 selects the least cost route, depending upon,
for example link state packet routing (LSP routing). Also, when a link becomes inoperative, the CPU learns this fact and initiates a new round of link state packet routing calculations in order to change its routing pathways to the various other routers in the network.

In an alternative embodiment of the invention, a linecard may support a plurality of ports rather than only one port as is shown in Fig. 6. Three dots 609 indicate that a large number of linecards may be supported by the Layer 2 switch or Layer 3 router.

The exemplary internal architecture of a typical Layer 2 switch or Layer 3 router as shown in block diagram 600 permits line speed transfer of an incoming packet to one or more outgoing ports, simultaneously with receipt of the packet. Only a small delay is encountered, depending upon factors, for example, the state of switch fabric 610 as the packet is received at its incoming port, and the delay imposed by ordinary switch fabric transfer processes along switch fabric 610.

In an alternative exemplary design of a Layer 2 switch or Layer 3 router, a linecard may transfer an incoming packet to global memory unit 620. CPU 612 reads fields of the packet and decides which linecards must transmit the packet. After the packet is received into global memory 620, the packet is read by each linecard which must transmit the packet, and then the packet is transmitted by the linecards. In either event, the hardware reads the fields of the appropriate Layer, and responds by making the appropriate decision.

It is to be understood that the above-described embodiments are simply illustrative of the principles of the invention, and various other modifications and changes may be made by those skilled in the art which embody the principles of the invention and fall within the spirit and scope thereof.

What is claimed is:

CLAIMS

5 1. A computer network having improved reliability in data transmissions, comprising:

an interpreter in a switch for interpreting a special multicast address in a packet received by said switch, said switch in response to receipt of a packet having said special multicast address, replicating said packet by transmitting identical copies of said packet on a plurality of ports of said switch;

a first router for receiving a first copy of said packet having said special multicast address transmitted from a first port of said plurality of ports of said switch, and a second router for receiving a second copy of said packet having said special multicast address, said second packet transmitted by a second port of said plurality of ports of said switch;

a first plurality of subsequent routers connected to said first router along an intended path for said first copy of said packet, said intended path having a plurality of links, and said links assigned a low cost in a Link State Packet Routing sense;

a second plurality of routers connected to said second router along an intended path for said second copy of said packet, said intended path having a plurality of links, and said links assigned a low cost in a Link State Packet Routing sense, said first plurality of routers connected to said second plurality of routers by links having assigned high costs in a Link State Packet Routing sense.

2. A network device for forwarding voice packets on a computer network, comprising:

an input port for receiving said voice packet;

5 a plurality of output ports assigned for transmitting said voice packet out of said network device in the event that a received packet carries a special multicast address in a layer 2 destination address field of said received packet;

10 a circuit to read said layer 2 destination address field of said received packet, and in the event that said special multicast address is found in said layer 2 destination address field of said received packet, to interpret said special multicast address as indicating that said received packet is said voice packet, and to transfer said voice packet to said plurality of output ports for transmission of replica packets of said voice packets through different paths in said computer network.

15 3. The apparatus of claim 2, further comprising: said network device is a layer 2 switch.

20 4. The apparatus of claim 2, further comprising: said network device is a router.

5. A method of improving reliability in data communications over a computer network, comprising:

25 receiving a voice data packet by a network device, replicating said voice data packet, and transmitting replica packets onto a first link and a second link;

assigning low cost to links, including said first link, in a first desired path through said computer network, said cost used by Link State Packet Routing protocol (LSP protocol) to select a route through said network;

assigning low cost to links, including said second link, in a second desired path through said computer network; and,

assigning high costs to links between said first desired path and said second desired path, so
5 that in response to assigning low costs to said first desired path and assigning low cost to said second desired path, LSP protocol selects said first desired path and said second desired path through said network, and in response to high costs assigned to said links between said first and said second desired paths, LSP does not select convergence of said first and said second desired paths when said first and said second desired paths are operative, and LSP routing selects convergence of said first and said second desired path upon failure of a link in either said first and said second desired path.

6. The method of claim 5 further comprising:

10 transmitting a voice data packet by a first digital telephone to a first network device;

transmitting, by said first network device, a replica packet of said voice data packet onto said first link for transmission through said first desired path through said computer network to a second network device;

20 transmitting, by said first network device, a replica packet of said voice data packet onto said second link for transmission through said second desired path through said computer network to said second network device;

25 converting by a second digital telephone a first replica packet of said voice data packet received by said second network device into audible sound, and discarding any subsequently received replica packets of said voice data packet.

7. The method of claim 6 further comprising: selecting said first replica packet of said voice data packet by said second network device.

8. The method of claim 6 further comprising: selecting said first replica packet of said voice data packet by said second digital telephone.

9. The method of claim 6 further comprising: selecting said first network device to be a layer 2 switch.

10. The method of claim 6 further comprising: selecting said first network device to be a router.

11. The method of claim 6 further comprising:
writing a sequence number into said voice data packet by said first digital telephone;
writing said sequence number into each said replica packet;
using said sequence number to determine the first received replica of said voice data packet by said second network device.

12. A computer readable device having instructions written thereon for practicing the method of claim 5.

13. Electromagnetic signals travelling on a computer network, said electromagnetic signals carrying instructions for practice of the method of claim 5.

ABSTRACT OF THE DISCLOSURE

5 The invention replicates a packet requiring high availability and transmits it from
two or more ports of a switch, for example a wiring closet Layer 2 switch. The parent
packet carries a unique sequence number. The copies of the packet each carry the parent
packet's unique sequence number. Each copy of the packet then travels on separate
pathways through routers (Layer 3 network devices). The pathways are maintained separate
by assigning high costs in a LSP routing sense to links connecting the two paths, and by
10 assigning low costs to links along the desired paths. The two identical packets converge on
the destination station. The destination station accepts the first packet with a particular
sequence number, and discards any later packets with the same sequence number. In the
event that a link in one path has a catastrophic failure, then the packet travelling along the
other path reaches the destination station and service remains operative without interruption.
15 The lost path is then recomputed by the a router (if any) still receiving the lost packet. A
new non-converging path may be selected if any are available, depending upon the
topology. After the disruption is repaired, the original dual pathways may once again be
established.

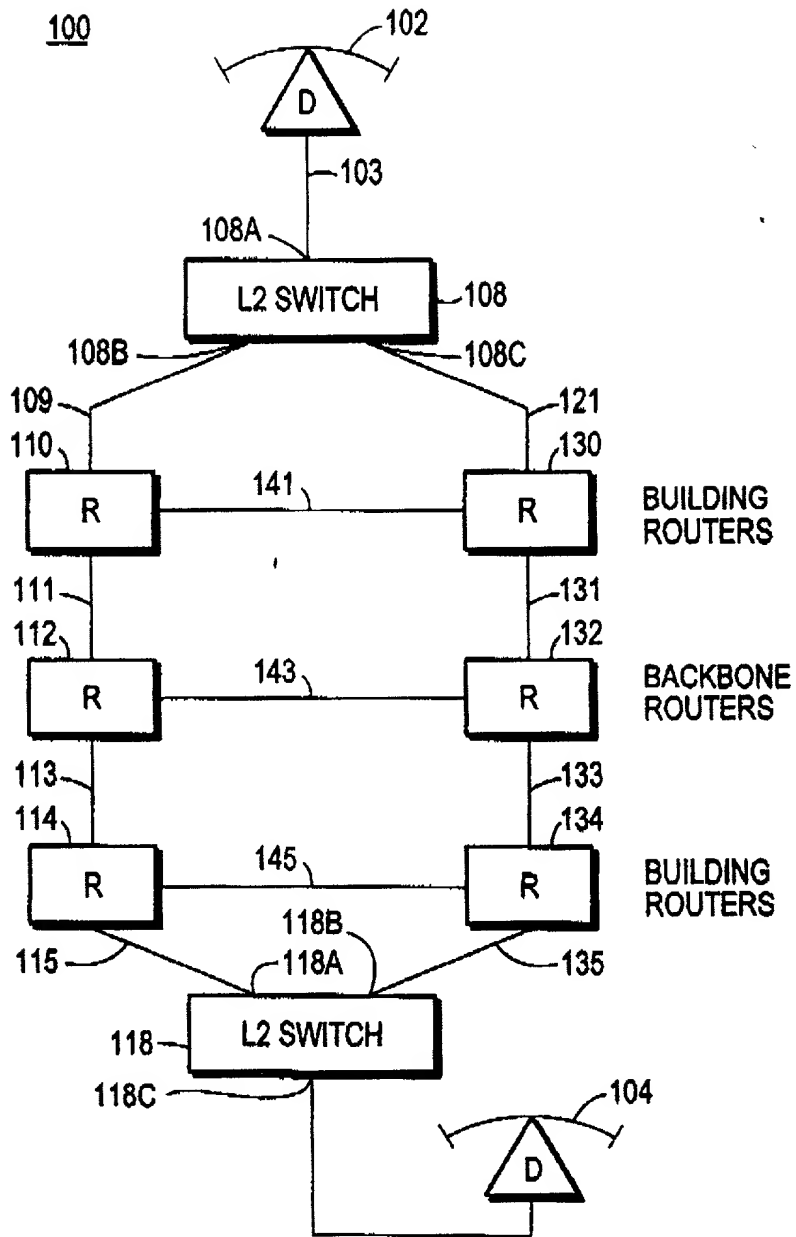


FIG. 1A

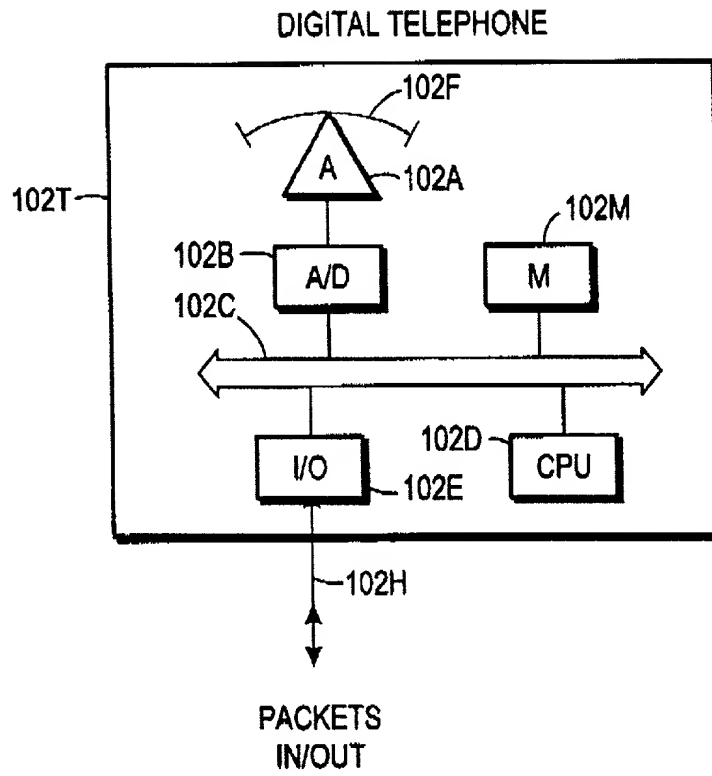


FIG. 1B


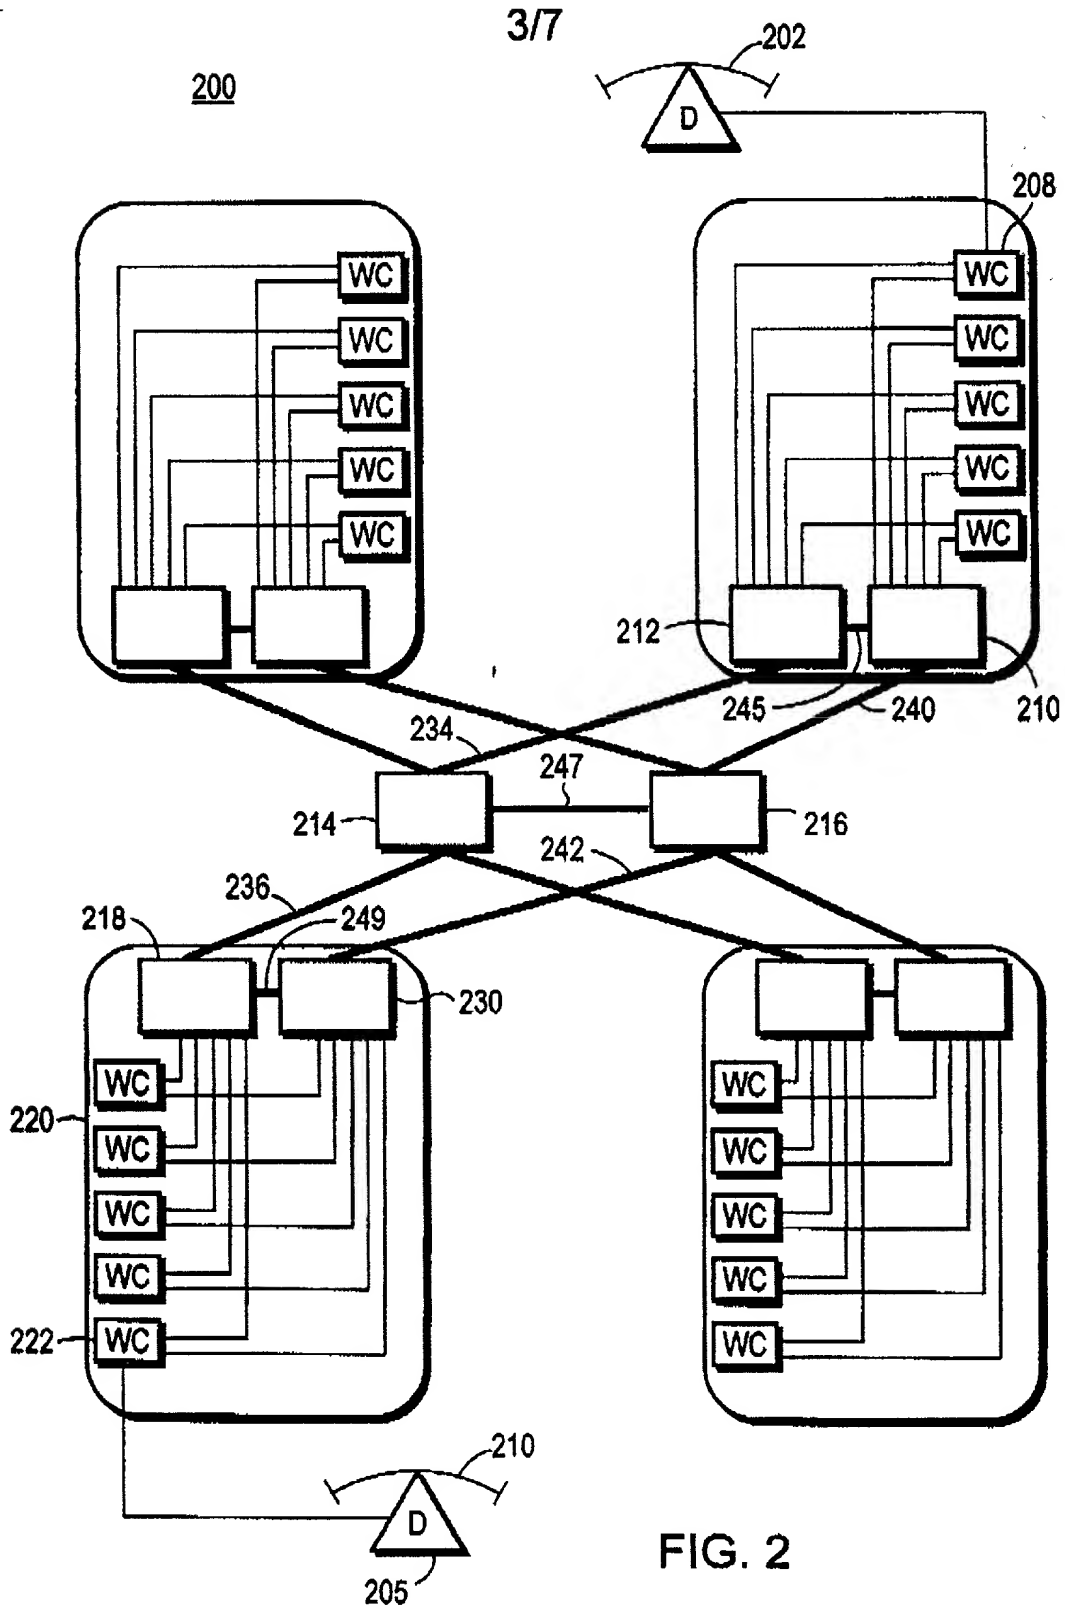


FIG. 2

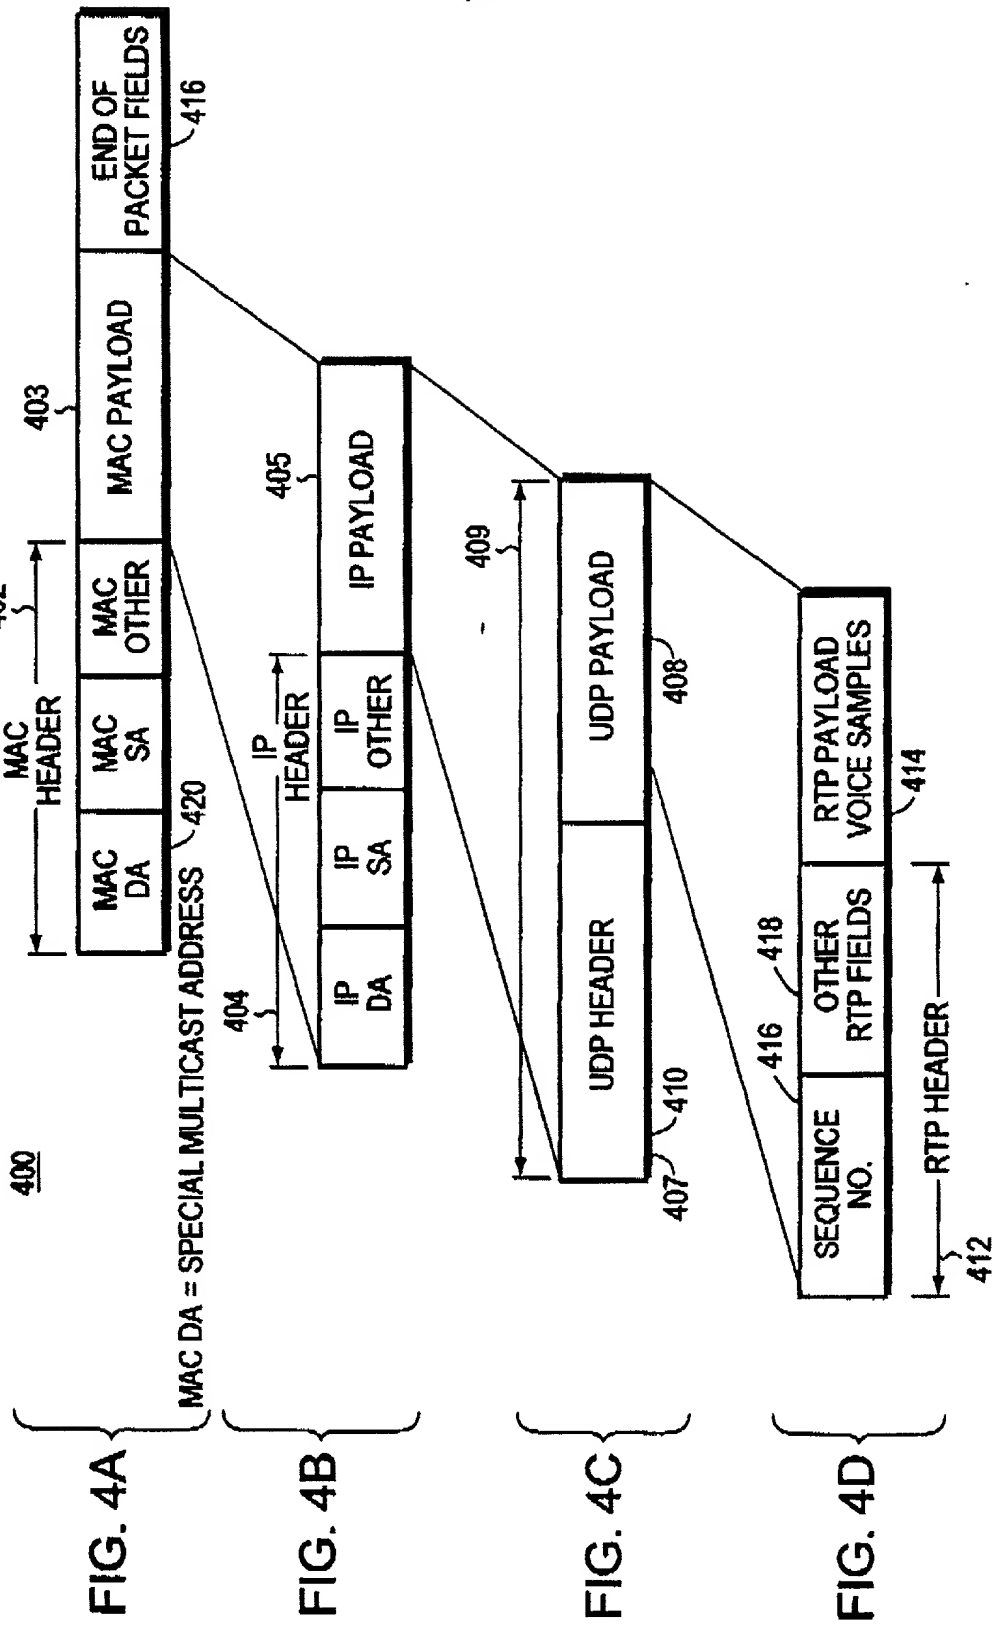


500

FIG. 5

600




FIG. 6

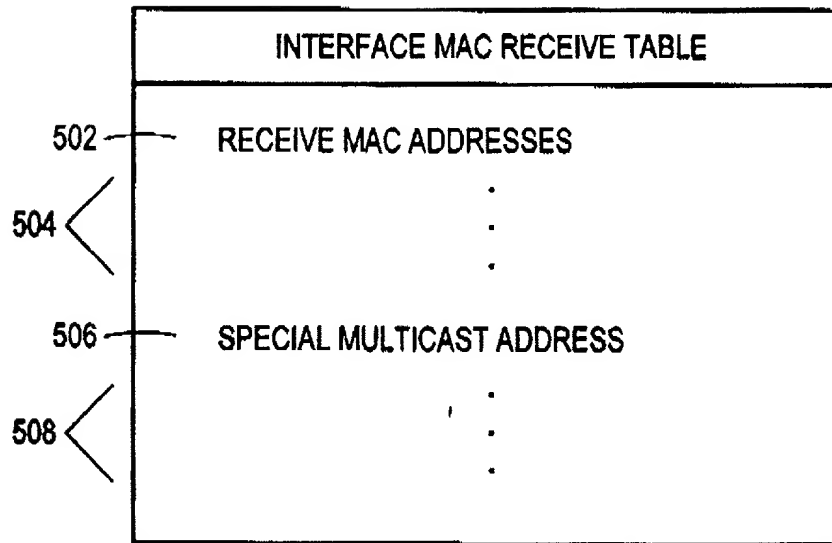

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

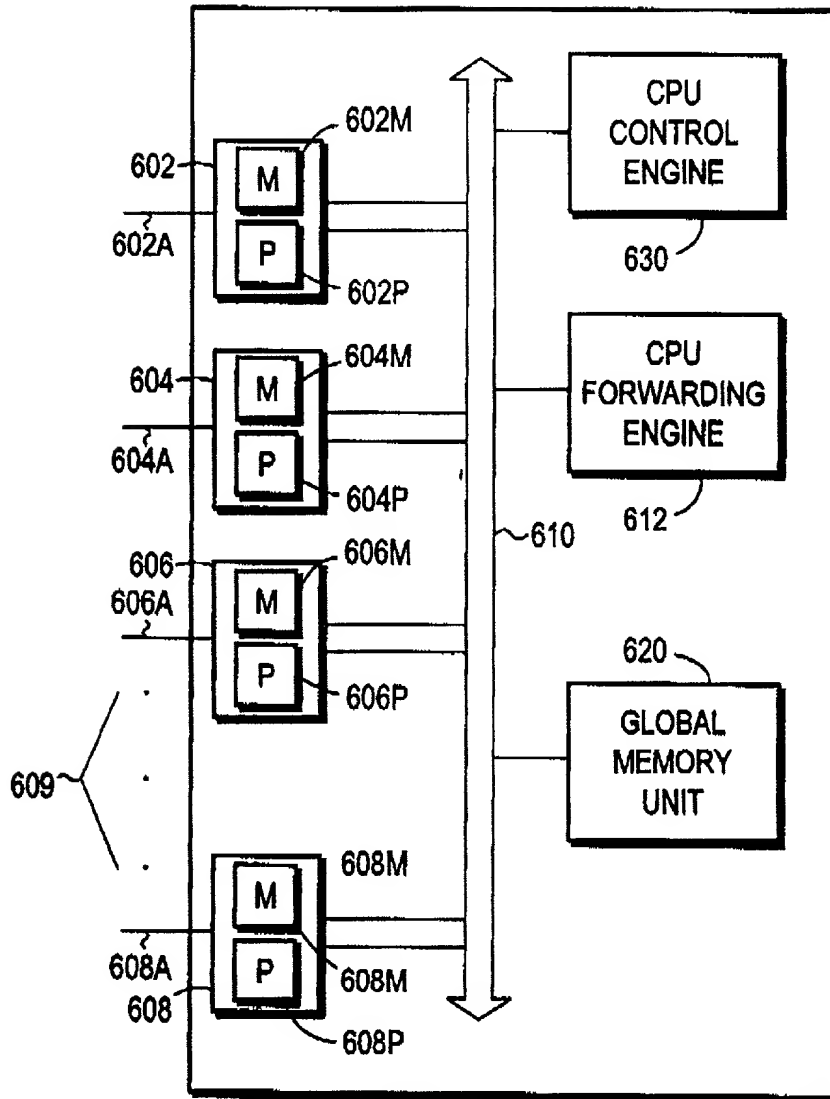My residence, post-office address, and citizenship are as stated below next to my name.

I believe I am an original, first, and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled MULTIPLE PACKET PATHS TO IMPROVE RELIABILITY IN AN IP NETWORK, the specification of which was filed on August 16, 2000, and accorded Serial Number 09/593,566 .

I hereby state that I have reviewed and understand the contents of the above-identified application specification, including the claims, as amended by any amendment specifically referred to herein.

I acknowledge the duty to disclose all information known to me that is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code §119(a)-(d) of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate filed by me on the same subject matter having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code §119(e) of the following U.S. provisional application:

None


I hereby claim the benefit under Title 35, United States Code §120, of the United States Application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United State Code, §112, I acknowledge the duty to disclose all information that is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56, and which became available to me between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the

like so made are punishable by fine or imprisonment or both under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint Michael E. Attaya, Reg. No. 31,731; Charles J. Barbas, Reg. No. 32,959; Joseph H. Born, Reg. No. 28,283; John L. Capone, Reg. No. 41,656; Robert A. Cesari, Reg. No. 18,381; Kathleen Chapman, Reg. No. 46,094; Brian C. Dauphin, Reg. No. 40,983; Howard S. Fuhrman, Reg. No. 33,175; A. Sidney Johnston, Reg. No. 29,548; William A. Loginov, Reg. No. 34,863; John F. McKenna, Reg. No. 20,912; Martin J. O'Donnell, Reg. No. 24,204; Thomas C. O'Konski, Reg. No. 26,320; Edwin H. Paul, Reg. No. 31,405; Michael R. Reinemann, Reg. No. 38,280; Rita M. Rooney, Reg. No. 30,585; Heather B. Shapiro, Reg. No. 41,305; and Patricia A. Sheehan, Reg. No. 32,301, Cesari and McKenna, LLP, 88 Black Falcon Avenue, Boston, Mass. 02210, jointly, and each of them severally, my attorneys and attorney, with full power of substitution, delegation and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent and to transact all business in the Patent and Trademark Office connected therewith. Please direct all telephone calls to A. Sidney Johnston at (617) 951-2500. Please address all correspondence to A. Sidney Johnston.



Thomas J. Edsall

3-9-01
Date

Residence: 13208 Peacock Court
Cupertino, CA 95014

Citizenship United States of America

Post Office Address: Same as above



Silvano Gai

3/7/2001
Date

Residence: 3021 Mauna Loa Ct.
San Jose, CA 95132

Citizenship Italian

Post Office Address: Same as above



Soei Shin Hang

3/9-01.

Date

Residence: 1360 Sage Hen Way
Sunnyvale, CA 94087

Citizenship United States of America

Post Office Address: Same as above